

VARGUS 



Thread Milling Handbook



VARDEX



Table of Contents

T H E O R Y

Introduction	3
About Thread Milling (general)	4
Vargus Thread Milling system	4
Advantages of the system and field of application	5
Climb and conventional milling methods	5
Infeed method	6
External/Internal RH. LH.	7
Coarse pitch threads	8
Fine pitch threads	8

T O O L S

How to find the correct toolholder	9
Tooling recommendation for given internal thread specification	10
Minimum bore diameters for thread milling	14
TM Gen software	15
Toolholder styles	16
Insert styles	17
The right insert for the job	17

P R O G R A M M I N G

CNC program	18
Program check	19
Conical threads	19
Speed and feed	20
Basic formulas for cutting conditions	20
Vibration	21

A P P E N D I X

Thread Milling insert standards	22
Thread dimensions of BSP - B.S.2779: 1956 medium class	23
Thread terminology	24
Specials	24
Manual CNC programming	25
Classic questions	26
Trouble shooting	28



Introduction

The most ingenious invention of the last millenium was actually the screw. The industrial production of the screw only began in the 1850's. It was invented by Vitold Reabchinsky.

In the distant past, the tools were activated by muscle power and were very similar to today's tools. The ancient hammers looked like their modern counterparts and so did the drills, planes, saws and files. The nails already served mankind in ancient times, mainly by joining parts together (mostly from wood). For that reason, man needed the hammer.

The screw, however, is a relatively modern invention. The principle of the screw had already been invented in the third century B.C. by Archimedes and screw-shaped fixtures were used in ancient times for water pumping or compression, for example, for squeezing olives or for torture instruments.

But screws for joining parts appeared only in the 16th century.

The early screws had a screwing head with one slot and the screwdriver only became popular with carpenters after 1800. Back then, screws were regarded as expensive luxury articles. The reason: production took place manually. Industrial production of the screw started only after 1850.


Cheap screws are actually a modern creation. Not only screws for wood serve modern civilization, but also screws designed for other materials, for example, steel that is used in modern building.

Steel screws used in the building industry obtain their strength from the friction between the screw and the nut. The screw presses the two workpieces together, and the more the screw is fastened – the more the pressure is increased.

This invention enabled the building of ships and houses, cupboards and tables, and also various domestic appliances.

The very accurate screw also enabled the building of amazingly accurate measuring instruments such as microscopes with an accuracy of up to a hundredth of a millimeter and transforming systems for telescopes that make accurate tracing of the planets possible.

Without screws the industrial revolution that rushed in the modern era would just not have taken place!

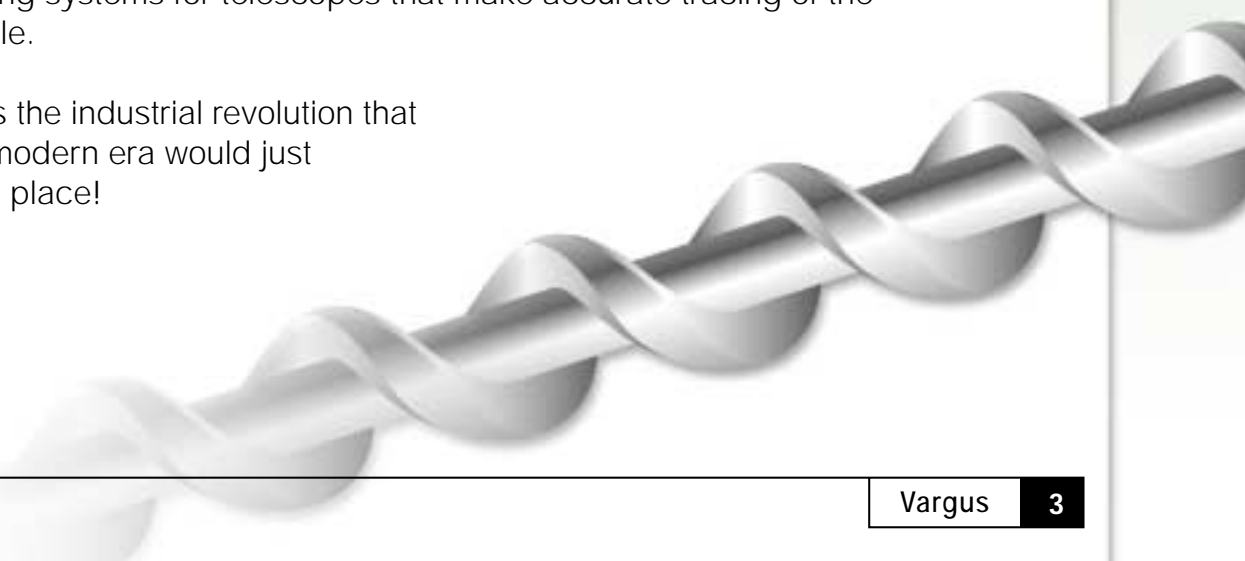


About Thread Milling (general)

Thread Milling is a method for producing a thread by a milling operation.


The most common way to produce a thread is still by tapping and turning but today we see more and more milling and this is because CNC milling machines with three simultaneous axes are very popular. These can now be found in every small workshop.

To perform a Thread Milling operation, a helical interpolation movement is required. Helical interpolation is a CNC function producing tool movement along a helical path. This helical motion combines circular movement in one plane (x,y coordinate) with a simultaneous linear motion in a plane perpendicular to the first (z coordinate).

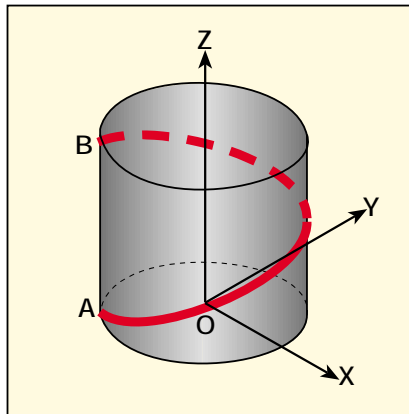

Vargus Thread Milling system

Vargus thread milling tools are based on indexable multitooth inserts. The cutter rotates around itself at high speed and at the same time moves along the helical path. All the teeth are machined simultaneously so every tooth creates one pitch. At the end of the operation all pitches are combined into one complete thread and that by one pass only. This result is achieved with Vardex high accuracy inserts and use of a CNC milling machine.

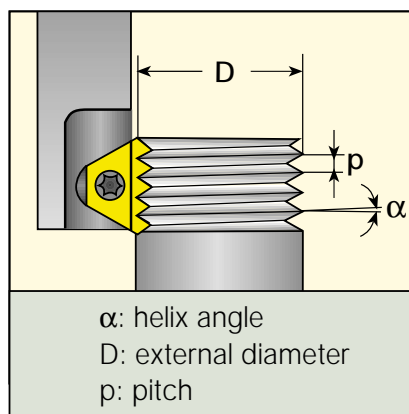



Advantages of the system and field of application

- Enables machining of large work pieces which cannot be easily mounted on a lathe
- Non-rotatable and non-symmetrical parts easily machined
- Complete operation in one clamping
- Threading of large diameters requires less power than threading by taps
- No upper limits to bore diameter
- Chips are short
- Blind holes without a thread relief groove can be machined
- Thread relief groove unnecessary
- One holder used for both internal and external threads
- One tool used for both right hand and left hand thread
- Tooling inventory can be reduced to a minimum as small range of tooling covers a wide range of thread profiles
- Interchangeable inserts
- Suitable for machining of hard materials
- Threads have a high surface finish
- Allows for correction of tool diameter and length
- Interrupted cuts easily machined
- One tool for a wide range of materials
- A better thread quality in soft materials where taps normally tear the material
- Short machining time due to high cutting speed and rapid feed rates
- Small cutting forces allow machining of parts with thin walls

Climb and conventional

There are two methods for the milling operation - climb milling and conventional milling.



For many years it was common practice to mill against the direction of the feed due to the absence of backlash eliminating devices and the use of high speed steel cutters. This method is called conventional milling.

In conventional milling, friction and rubbing occur as the insert enters into the cut, resulting in chip welding and heat dissipation into the insert and workpiece.

Climb milling, the second method, is now generally recommended. The insert enters the workpiece material with some chip load and proceeds to produce a chip that thins as it progresses towards the finish. This reduces the heat by dissipating it into the chip.

Based on the above, Vargus recommends using the climb operation which will give you:

- reduced load from the cutting corner
- better tool life
- better surface finish



Infeed method


How does the thread milling cutter enter and exit the workpiece?

Tangential arc approach - The best method !!!


With this method, the tool enters and exits the workpiece smoothly. No marks are left on the workpiece and there is no vibration, even with harder materials.

Although it requires slightly more complex programming than the radial approach (see below), this is the method recommended for machining the highest quality threads.

Internal Thread

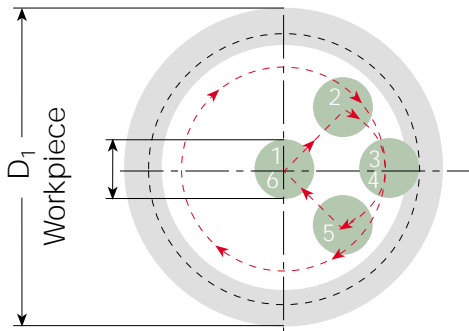

External Thread

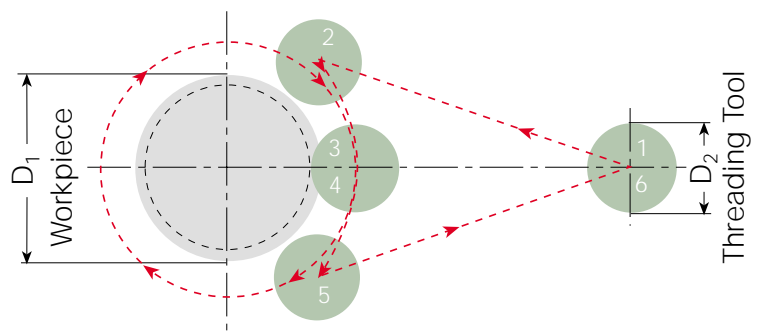

1-2: rapid approach

2-3: tool entry along tangential arc, with simultaneous feed along z-axis

3-4: helical movement during one full orbit (360°)

4-5: tool exit along tangential arc, with continuing feed along z-axis

5-6: rapid return


Radial approach

This is the simplest method. There are two characteristics worth noting about the radial approach:


- a small vertical mark may be left at the entry (and exit) point. This is of no significance to the thread itself.
- when using this method with very hard materials, the tool may have a tendency to vibrate as it approaches the full cutting depth.

Note: Radial feed during entry to the full profile depth should only be 1/3 of the subsequent circular feed!...

Internal Thread

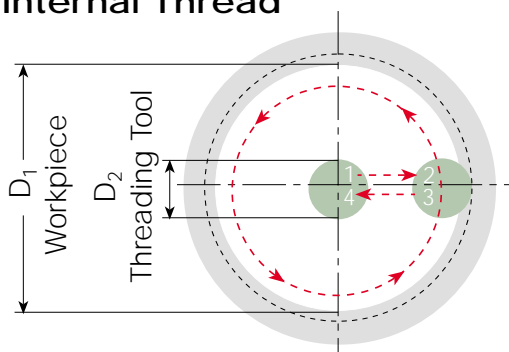

External Thread

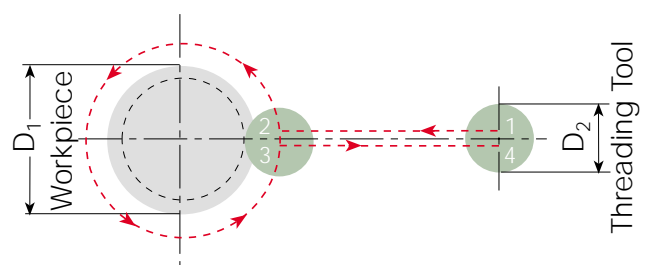

1-2: radial entry

2-3: helical movement during one full orbit (360°)

3-4: radial exit


External/Internal RH. LH.

Vardex TM tools can produce external and internal, RH or LH threads depending only on the tool path which is programmed. The following drgs. will clarify it very easily.


For conical applications such as NPT or BSPT, left hand tools can be used. In such a case the tool must be moved in the opposite direction.

Thread Milling methods


External

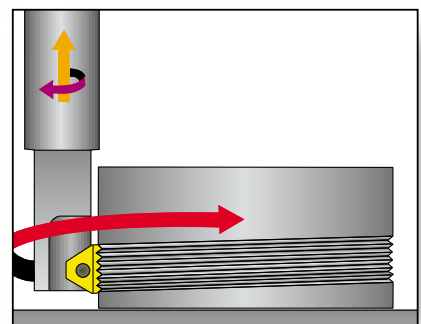


Right Hand Thread - Conventional Milling

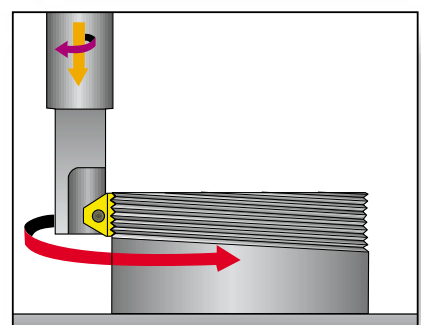

Left Hand Thread - Conventional Milling

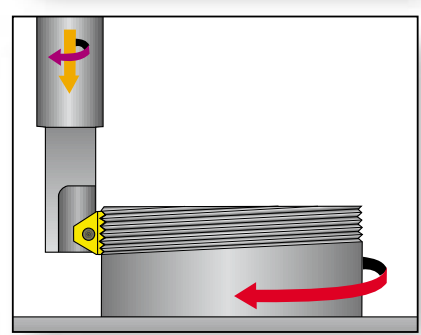


Right Hand Thread - Climb Milling

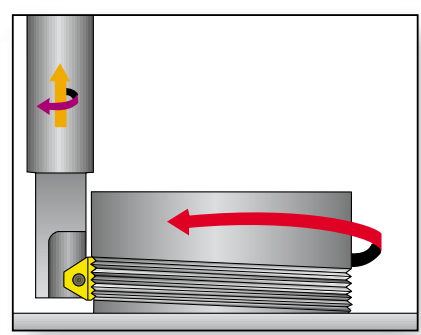


Left Hand Thread - Climb Milling


Internal

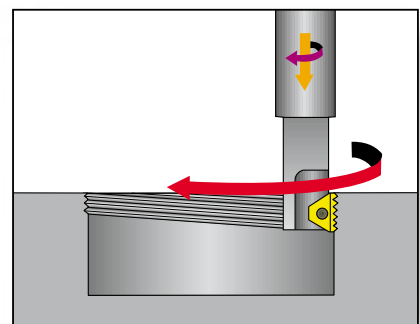


Right Hand Thread - Conventional Milling

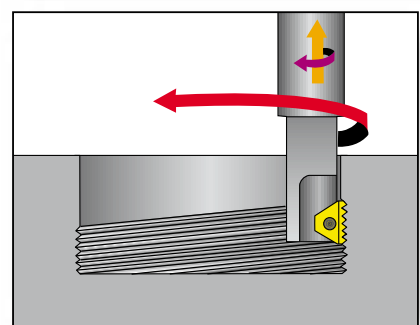

Left Hand Thread - Conventional Milling

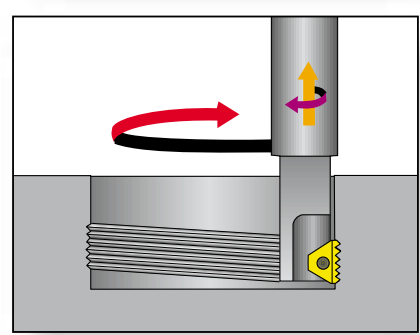

Right Hand Thread - Climb Milling

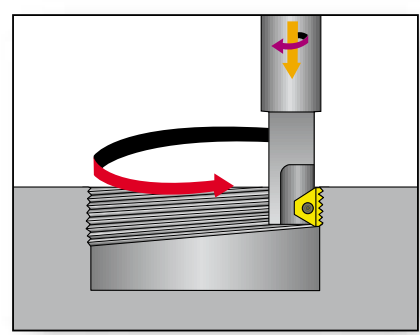

Left Hand Thread - Climb Milling

Coarse pitch threads


Internal

Coarse pitch threads are a combination of small thread dia. and relatively large pitches. The thread milling operation is based on three-axes simultaneous movement so the profile shape on the workpiece is not a copy of the insert profile. In other words the profile is generated and not copied which is contrary to the thread turning operation.

This fact causes a profile distortion, especially when machining coarse pitch internal threads.

The profile distortion depends on four main parameters:

- Thread dia. • Tool cut. dia. • Thread pitch • Profile angle

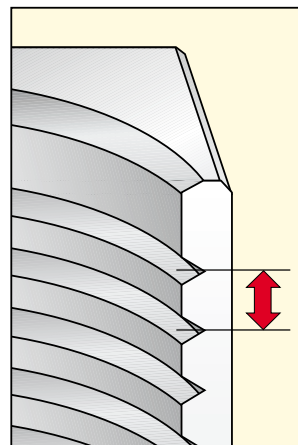

For internal threads, as a general rule, when the ratio between cutting tool dia. (D_2) and the thread dia. (minor dia.) is below 70% the profile distortion is neglected.

Above this ratio, however, the standard inserts will not give the correct profile.

We in Vargus have developed tools which correct the profile distortion and by that give a solution for the coarse pitch threads.

The inserts are identified in the catalogue by the no. 028/... and the toolholders by the number 124/... In our new catalog, tables can be found which indicate exactly which tools to use for every standard thread.

E.g.: For M24x3.0 (coarse pitch thread) the right toolholder is TMC 25-4 124/002 + insert 4I3.0ISOTM 028/007.

But for M42x3.0 (non-coarse pitch thread) the right tool is TMC 25-5 holder + 5I3.0ISOTM2 insert.

External

In general, for external thread (such as ISO, UN, W) the profile distortion is neglected.


For small profile angle such as ACME (29 deg.) and TRAPEZ (30 deg.) every case should be examined separately.

Fine pitch threads

Fine pitch threads are threads with small pitches.

It is difficult to produce multitooth inserts for small pitches because of the small radius between the teeth.

Vargus developed inserts where every second tooth was dropped to enlarge the radius between the teeth.

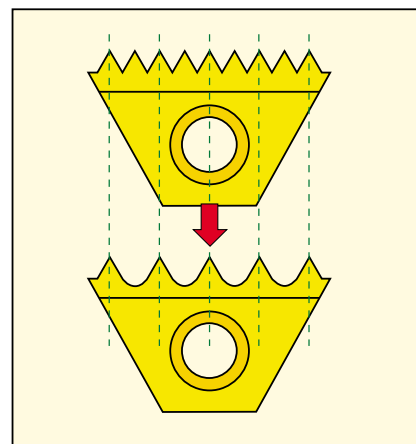

Important!

- All the fine pitch inserts are partial profile type (as a result of the enlarged radius).
- Two orbits are required to complete the thread because we dropped every second tooth.

Australia

**Vargus-Neumo
Australia Pty. Ltd.**

Tel: +61 (0) 357 843 690
Fax: +61 (0) 357 843 533

Denmark

Damstahl Tooling a/s

Tel: +45 (0) 86 52 2800
Fax: +45 (0) 86 51 0099

France

Vargus France sarl

Tel: +33 (0) 1 46 60 82 20
Fax: +33 (0) 1 46 60 90 99

Germany

Neumo GmbH

Tel: +49 (0) 7043 36 0
Fax: +49 (0) 7043 36 160

Israel

Neumo-Vargus Ltd.

Tel: +972 (0) 3 537 3275
Fax: +972 (0) 3 537 2190

Poland

Neumo-Vargus Ltd.

Tel: +48 (0) 46 833 4306
Fax: +972 (0) 46 832 5626

Switzerland

**Vargus Werkzeug-
Technik SNEL AG**

Tel: +41 (0) 41 784 21 21
Fax: +41 (0) 41 784 21 39

United Kingdom

Damstahl Tooling

Tel: +44 (0) 1952 58 32 22
Fax: +44 (0) 1952 58 33 83

United States

V.N.E. Corp. Ltd.

Tel: +1 800 828 8765
+1 608 756 4930
Fax: +1 608 741 7125

Belgium

N.V. van Maele

Tel: +32 (0) 9 386 55 92
Fax: +32 (0) 9 386 09 51

Czechia

ALBA Precision spol. s.r.o.

Tel: +420 (0) 5 4522 6400
Fax: +420 (0) 5 4853 2689

Croatia/Slovenia

Okret d.o.o.

Tel: +385 2122 8449
Fax: +385 2122 8464

Greece

Carbocut Ltd.

Tel: +30 (0) 1 34 75 111
Fax: +30 (0) 1 34 25 621

Holland

Cerametal & Co.

Tel: +31 (0) 165 550 800
Fax: +31 (0) 165 556 176

India

Hemant Tools

Tel: +91 (0) 22 342 1174
Fax: +91 (0) 22 342 8095

Italy

Novatea S.p.A.

Tel: +39 015 582 1893, 5, 6
Fax: +39 015 582 1909

Japan

Fuji Koeki Co. Ltd.

Tel: +81 (0) 6531 5631
Fax: +81 (0) 6531 5606

New Zealand

Alpine Industrial

Tel: +64 (0) 9 262 3545
Fax: +64 (0) 9 262 2798

Singapore

JEP Industrades Pte. Ltd.

Tel: +65 5454 222
Fax: +65 5452 823

South Africa

Pilot Tools (PTY) Ltd.

Tel: +27 (0) 11 616 8130
Fax: +27 (0) 11 616 7758

Spain

Trans Inter S.A.

Tel: +34 (0) 93 261 81 10
Fax: +34 (0) 93 335 81 86

Taiwan

Hung Chih Ltd. Co.

Tel: +886 (0) 6 225 2216
Fax: +886 (0) 6 220 5993

Thailand

P.S.C. Cutting Tools

Tel: +66 (0) 2427 4535
Fax: +66 (0) 2427 4534

Turkey

Teknik Hirdevat Evi

Tel: +90 (0) 212 210 2796
Fax: +90 (0) 212 210 2961

Venezuela

Tuvenca

Tel/Fax: +58 (0) 993 3037

Your VARDEX dealer:



Vargus Ltd.

1 Hayotsrim St.

Nahariya 22311, Israel

Tel. +972 (0)4 985-5111

Fax. +972 (0)4 982-5810

Web. <http://www.vargus.co.il>

E-mail: mrktg@vargus.co.il